



Qualitu Flexible Metal Ducts

Type EV Eave Venting

Unsuled Class 0 UL 181 Air Duct Attached

PRODUCT DESCRIPTION

Uninsulated Class 0, Flexible Air Duct Attached

This is an alternative to piercing the roof thus providing cleaner looking lines to the home. The openings are of a size to prevent the intrusion of bugs.

AVAILABILITY

Product in available in 3" and 4" sizes. This includes 6 feet of UL listed duct which is attached in a compressed configuration.




PERFORMANCE DATA

Maximum Positive and Negative Pressures
 Sizes 4" to 10" Diameter 12" W.C.
 Sizes 12" to 20" 8" W.C. Maximum
 Velocity 5000 FPM
 Operating Temperature -100F to +430F

Flame spread 0 and Smoke detected of 0. Meets the requirements of numerous city and government standards.

The duct which is attached to the vent cap is described in UL File MH29962. Meets UL 181 Class 0 requirements.

Aluminum Flexible Duct

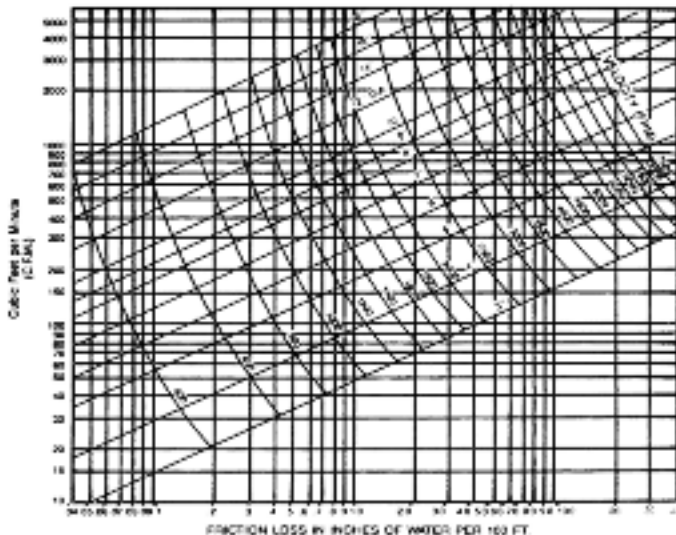

Polar policy is one of continual product improvement in design and mfg wherever possible. Therefore all specifications and designs are subject to change without notice or incurring obligations.

CONTACT US

Polar Air Supply LLC
 6461 Garden Road #130
 Riviera Beach, Florida 33404
 www.polarairsupply.com
 Phone: Jon 561-248-2479 or Jeff 561-267-1339
 Fax: 561-537-2513
 Email: jon@polarairsupply.com
 jeff@polarairsupply.com

Visit www.polarairsupply.com