



Semi-Rigid Aluminum Insulated Air Duct




PHYSICAL DESCRIPTION

PBreeze is manufactured in 8ft. lengths with an intergal crimp provided to allow multiple pieces to be joined together. The duct should be considered for the better home for those that can see the benefits of the superior product. It is very durable and can be cleaned many times. It is the perfect for fresh air make up. Also consider our new Copper product.

PRODUCT DATA

4",5",6",7",8",9",10",12",14",16",18",20" Diameters available. The product is delivered at its full manufactured length of 8 feet. We do not compress our product when shipped.

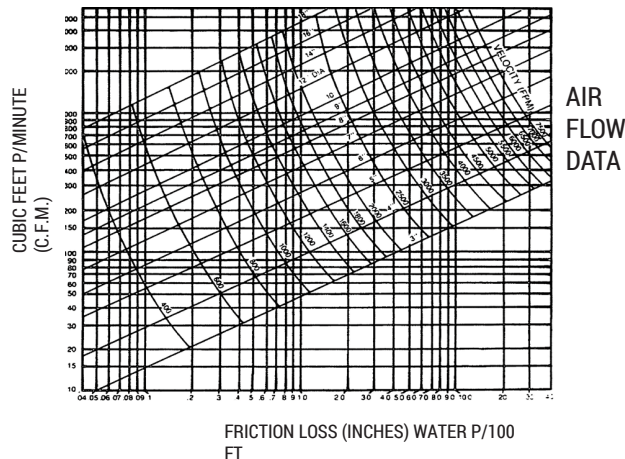

PERFORMANCE DATA



- Maximum Positive and Negative Pressures.
- Sizes 4" to 10" Dia. 12" W.C.
- Sizes 12' TO 20" 8" W.C. Maximum.
- Velocity 5500 FPM .
- OperatingTemp -100F to +250F
- Flame spread less than 25
- Smoke developed less than 50.
- Meets Government standards
- UL Listed And Labeled Non-magnetic
- Thermal Value: The duct is tested to R6 and bears the UL adjunct marking linking it to the ADC Thermal Certification Mark.
- The duct is described in UL File MH29962.
- Meets UL 181 Class 1 Requirements and bears the mark.

SUGGESTED SPECIFICATION



Bendable ducts shall be constructed of all metal. The duct should be listed and labeled by Underwriters Laboratories and meet the guidelines of UL 181. Bend and stay metal ducts shall be used to connect supply ducts with air distribution registers. Ducts should be as manufactured by Polar Air.

Polar policy is one of continual product improvement in design and manufacturing wherever possible. Therefore all specifications & designs are subject to change without incurring obligations.

MANUFACTURED BY POLAR AIR COMPANY

TEL 561.248.2479

6461 Garden Road, Suite 130 | Riviera Beach, FL 33404

www.polarairco.com - email: info@polarairco.com



PAS_COBRE291045 / 02.05.18